

CWR 'CLICK' WRENCH SERIES




— Scale 1:1 of CWR-20 —



The torque wrenches in our CWR series provide the distinctive "Click" which is a very clear feedback when reaching the pre-set torque value. The repeatability of $\pm 4\%$ makes them perfect for use in assembly lines.

For an adjustment of the pre-set value an optional setting key is available (Refer to page 13).

- Wide range from 2 Nm up to 300 Nm
- Reversible version "R" for tightening in both directions
- Very small sizes ideal for tightening in limited space
- Repeatability of $\pm 4\%$
- Easy and safe adjusting and handling
- Standard drive (9x12 or 14x18) for a wide range of suitable end fittings (Refer to page 10–15).

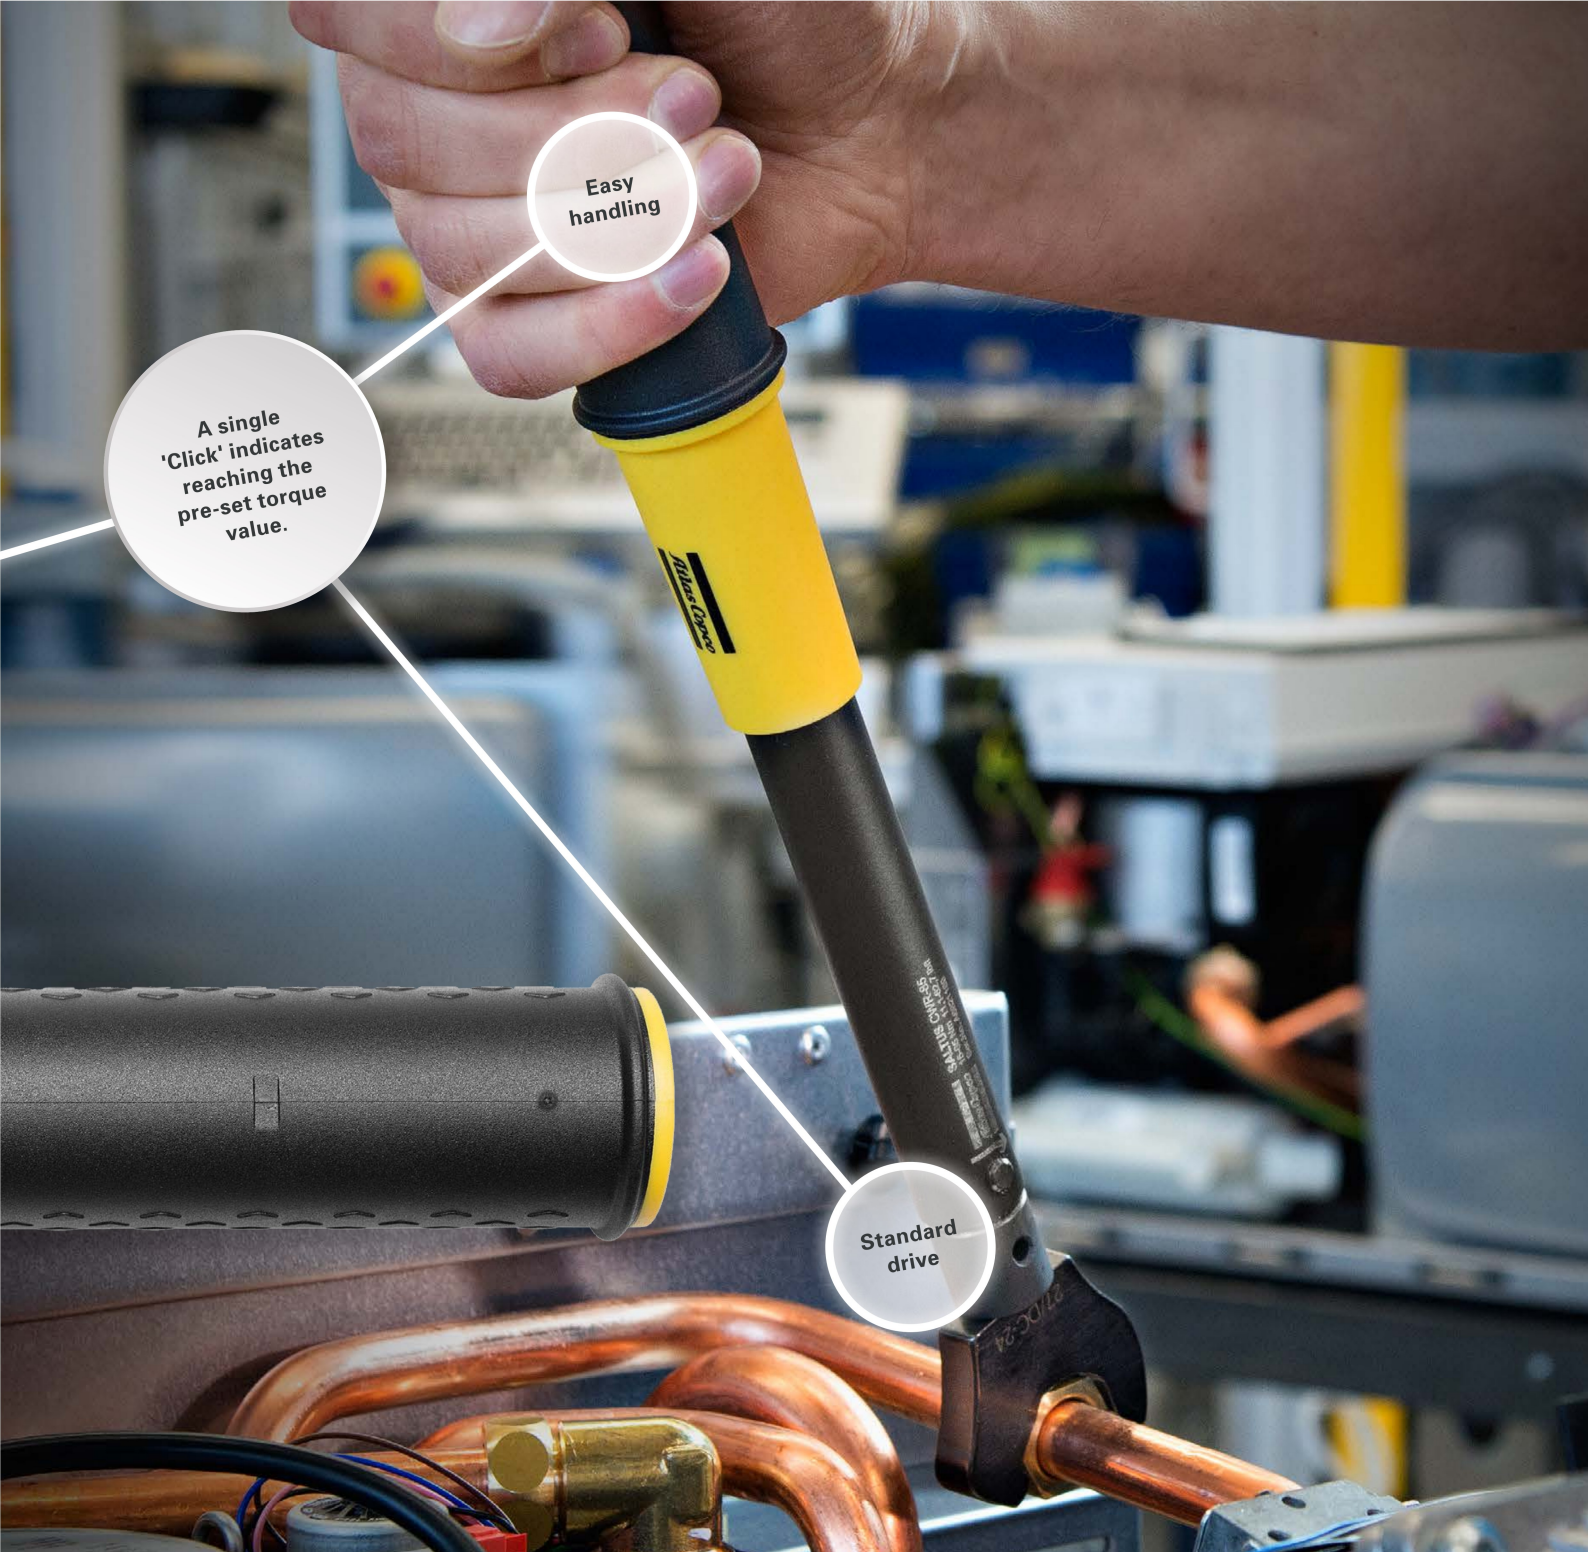

CWR – 'Click' wrench series						
Type	Torque Range		Length	Weight	Ø	Drive
	Nm	ft.lb	mm	g	mm	
CWR-20	03-20	2.2-14.8	129	248	21	9x12
CWR-25	02-25	1.5-18.4	174	288	21	9x12
CWR-50	05-50	3.7-37	236	466	21	9x12
CWR-85	15-85	11-62.7	305	576	21	9x12
CWR-120	50-120	37-88.5	349	666	24	9x12
CWR-200	50-200	37-148	419	916	30x26	14x18
CWR-300	60-300	44.2-221	685	1366	32x28	14x18
Reversible wrench type						
CWR-20 R	03-20	2.2-14.8	129	248	21	9x12
CWR-25 R	02-25	1.5-18.4	174	288	21	9x12
CWR-50 R	05-50	3.7-37	236	466	21	9x12
CWR-85 R	15-85	11-62.7	305	576	21	9x12
CWR-120 R	50-120	37-88.5	349	666	24	9x12